-
~
n
· U

5

4

3

NOTES: UNLESS OTHERWISE SPECIFIED

DIMENSION

D

С

В

А

- 1. LASER CUT PATTERN
 - INTERRUPTED SPIRAL CUT PATTERN •
 - LASER CUT KERF = 0.0012 ± 0.0003 [0.0254MM]
 - PITCH = 0.015 [0.381MM] ٠
 - CUT ANGLE = 65° •
 - UNCUT ANGLE = 15° ٠
 - CPR = 4.5 ٠

RAW MATERIAL

- 2. 16G-XXTW STANDARD GAUGE AND TOLERANCING
- 3. 304 SS, FULL HARD

CLEANING AND PASSIVATION

- 4. PARTS FREE OF OIL, DIRT, CONTAMINATION, ETC.
- 5. PARTS CLEANED PER ASTM A380
- 6. PARTS PASSIVATED PER ASTM-A967, NITRIC 2


PACKAGING

- 7. PARTS PACKAGED IN CLEAR, SEALED BAGS
- PARTS PACKAGED IN A MANNER THAT PREVENTS 8. DAMAGE DURING SHIPPING
- 9. BAGS TO BE LABLED WITH FOLLOWING INFORMATION:
 - SUPPLIER NAME •
 - SUPPLIER LOT NUMBER ٠
 - SUPPLIER PART NUMBER •
 - PART QUANTITY ٠

DOCUMENTATION

6

- **10. CERTIFICATION OF CONFORMANCE TO ACCOMPANY** EACH SHIPMENT AND SHALL INCLUDE THE FOLLOWING **INFORMATION:**
 - SUPPLIER NAME •
 - SUPPLIER LOT NUMBER ٠
 - SUPPLIER PART NUMBER •
 - PART QUANTITY ٠
 - PO NUMBER ٠
 - MATERIAL INFORMATION
 - CONFORMANCE STATEMENT TO DRAWING

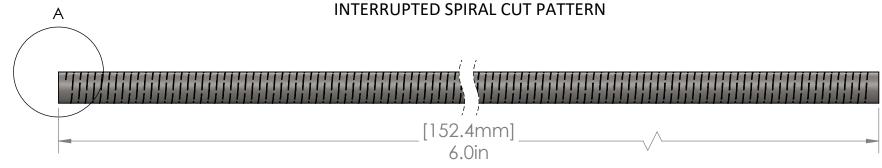



DETAIL A SCALE 20:1

DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED	
.X ± .1	
.XX ± .01	-
.XXX ± .001	
ANGLES: ± 3°	
INTERPRET PER LATEST ASME Y14.5	THIS DI
	DISCLO

MATERIAL: 304 SS

3

5

4

D

С

В

