6

5

4

3

NOTES: UNLESS OTHERWISE SPECIFIED

DIMENSION

D

С

В

А

- 1. LASER CUT PATTERN
 - INTERRUPTED SPIRAL CUT PATTERN •
 - LASER CUT KERF = 0.0012 ± 0.0003 [0.0254MM]
 - PITCH = 0.005 [0.127MM]
 - CUT ANGLE = 65° •
 - UNCUT ANGLE = 15° ٠
 - CPR = 4.5٠

RAW MATERIAL

- 2. 11G-XXTW STANDARD GAUGE AND TOLERANCING
- 3. 304 SS, FULL HARD

CLEANING AND PASSIVATION


- 4. PARTS FREE OF OIL, DIRT, CONTAMINATION, ETC.
- 5. PARTS CLEANED PER ASTM A380
- 6. PARTS PASSIVATED PER ASTM-A967, NITRIC 2


PACKAGING

- 7. PARTS PACKAGED IN CLEAR, SEALED BAGS
- 8. PARTS PACKAGED IN A MANNER THAT PREVENTS DAMAGE DURING SHIPPING
- 9. BAGS TO BE LABLED WITH FOLLOWING INFORMATION:
 - SUPPLIER NAME ٠
 - SUPPLIER LOT NUMBER
 - SUPPLIER PART NUMBER •
 - PART QUANTITY •

DOCUMENTATION


- **10. CERTIFICATION OF CONFORMANCE TO ACCOMPANY** EACH SHIPMENT AND SHALL INCLUDE THE FOLLOWING **INFORMATION:**
 - SUPPLIER NAME •
 - SUPPLIER LOT NUMBER ٠
 - SUPPLIER PART NUMBER •
 - PART QUANTITY ٠
 - PO NUMBER ٠
 - MATERIAL INFORMATION
 - CONFORMANCE STATEMENT TO DRAWING

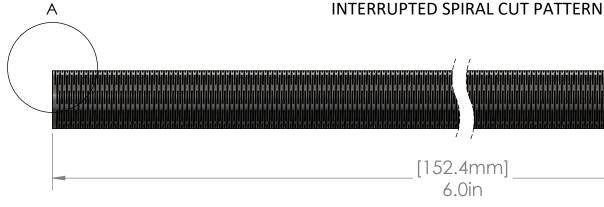



DETAIL A SCALE 20:1

| DIMENSIONS ARE IN INCHES, UNLESS |
|----------------------------------|
| OTHERWISE SPECIFIED |
| .X ± .1 |
| .XX ± .01 |
| .XXX ± .001 |
| ANGLES: ± 3° |
| INTERPRET PER LATEST ASME Y14.5 |
| |



3



D С 3.048mm Ø 0.120in OD В 2.845mm Ø0.112in ID 10F LCHT - 0.120 x 0.112 - 0.005 Pitch, 65 Cut 15 Uncut (4.5 CPR) А PART NUMBER: CONFIDENTIAL AND PROPRIETARY SIZE SY-027120 THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETRAY В INFOMATION THAT IS THE SOLE PROPERTY OF SYMMETRY LLC. DISCLOSURE OF SAID INFORMATION DOES NOT CONSTITUTE THE RELEASE OF ANY PROPRIETARY RIGHTS THEREIN DO NOT SCALE SCALE 5:1 Sheet 1 of 1 2 1

5

4

6