6

5

4

3

# NOTES: UNLESS OTHERWISE SPECIFIED

### DIMENSION

D

С

В

А

- 1. LASER CUT PATTERN
  - INTERRUPTED SPIRAL CUT PATTERN •
  - LASER CUT KERF = 0.0012 ± 0.0003 [0.0254MM]
  - PITCH = 0.015 [0.381MM] ٠
  - CUT ANGLE = 80° •
  - UNCUT ANGLE = 22.85° ٠
  - CPR = 3.5 ٠

## **RAW MATERIAL**

- 2. 9G-UTW STANDARD GAUGE AND TOLERANCING
- 3. 304 SS, FULL HARD

## **CLEANING AND PASSIVATION**


- 4. PARTS FREE OF OIL, DIRT, CONTAMINATION, ETC.
- 5. PARTS CLEANED PER ASTM A380
- 6. PARTS PASSIVATED PER ASTM-A967, NITRIC 2


#### PACKAGING

- 7. PARTS PACKAGED IN CLEAR, SEALED BAGS
- PARTS PACKAGED IN A MANNER THAT PREVENTS 8. DAMAGE DURING SHIPPING
- 9. BAGS TO BE LABLED WITH FOLLOWING INFORMATION:
  - SUPPLIER NAME ٠
  - SUPPLIER LOT NUMBER
  - SUPPLIER PART NUMBER •
  - PART QUANTITY •

#### DOCUMENTATION

- **10. CERTIFICATION OF CONFORMANCE TO ACCOMPANY** EACH SHIPMENT AND SHALL INCLUDE THE FOLLOWING **INFORMATION:** 
  - SUPPLIER NAME ٠
  - SUPPLIER LOT NUMBER ٠
  - SUPPLIER PART NUMBER •
  - PART QUANTITY ٠
  - PO NUMBER ٠
  - MATERIAL INFORMATION
  - CONFORMANCE STATEMENT TO DRAWING

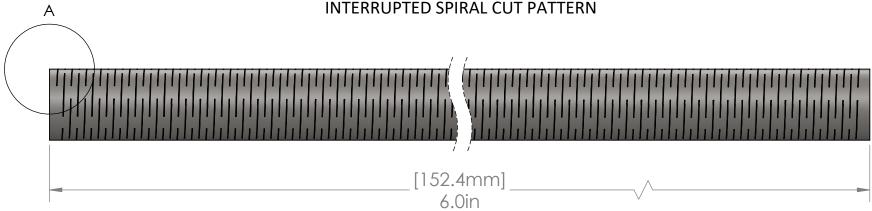

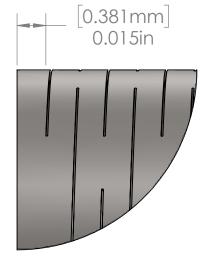

DETAIL A SCALE 20:1

> DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED .X ± .1 .XX ± .01 .XXX ± .001 ANGLES: ± 3° INTERPRET PER LATEST ASME Y14.5



MATERIAL: 304 SS

3

6

5

4

D

С

В

