D

С

- - INTERRUPTED SPIRAL CUT PATTERN
 - LASER CUT KERF = $0.0012 \pm 0.0003 [0.0254MM]$
 - PITCH = 0.015 [0.381MM]
 - CUT ANGLE = 120°
 - UNCUT ANGLE = 24°
 - CPR = 2.5

RAW MATERIAL

- 2. 15G-UTW STANDARD GAUGE AND TOLERANCING
- 3. 304 SS, FULL HARD

CLEANING AND PASSIVATION

- 4. PARTS FREE OF OIL, DIRT, CONTAMINATION, ETC.
- 5. PARTS CLEANED PER ASTM A380
- 6. PARTS PASSIVATED PER ASTM-A967, NITRIC 2

PACKAGING


- 7. PARTS PACKAGED IN CLEAR, SEALED BAGS
- PARTS PACKAGED IN A MANNER THAT PREVENTS DAMAGE DURING SHIPPING
- 9. BAGS TO BE LABLED WITH FOLLOWING INFORMATION:
 - SUPPLIER NAME
 - SUPPLIER LOT NUMBER
 - SUPPLIER PART NUMBER
 - PART QUANTITY

DOCUMENTATION

- 10. CERTIFICATION OF CONFORMANCE TO ACCOMPANY EACH SHIPMENT AND SHALL INCLUDE THE FOLLOWING INFORMATION:
 - SUPPLIER NAME
 - SUPPLIER LOT NUMBER
 - SUPPLIER PART NUMBER
 - PART QUANTITY
 - PO NUMBER


6

- MATERIAL INFORMATION
- CONFORMANCE STATEMENT TO DRAWING

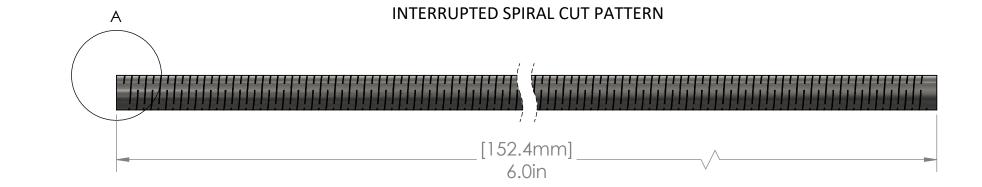



DETAIL A **SCALE 20:1**



DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED

 $.X \pm .1$ $.XX \pm .01$ $.XXX \pm .001$ ANGLES: ± 3°

INTERPRET PER LATEST ASME Y14.5

MATERIAL: 304 SS



THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETRAY INFOMATION THAT IS THE SOLE PROPERTY OF SYMMETRY LLC. DISCLOSURE OF SAID INFORMATION DOES NOT CONSTITUTE

6F LCHT - 0.072 x 0.065 - 0.015 Pitch, 120 Cut 24 Uncut (2.5 CPR)

PART NUMBER: SIZE В

SY-026800

DO NOT SCALE | SCALE 5:1

SHEET 1 OF 1

1

C

5 3 2

В