D

С

В

- - CUT ANGLE = 120°
 - UNCUT ANGLE = 24°
 - CPR = 2.5

RAW MATERIAL

- 2. 3G-XTW STANDARD GAUGE AND TOLERANCING
- 3. 304 SS, FULL HARD

CLEANING AND PASSIVATION

- 4. PARTS FREE OF OIL, DIRT, CONTAMINATION, ETC.
- 5. PARTS CLEANED PER ASTM A380
- 6. PARTS PASSIVATED PER ASTM-A967, NITRIC 2

PACKAGING


- 7. PARTS PACKAGED IN CLEAR, SEALED BAGS
- PARTS PACKAGED IN A MANNER THAT PREVENTS DAMAGE DURING SHIPPING
- 9. BAGS TO BE LABLED WITH FOLLOWING INFORMATION:
 - SUPPLIER NAME
 - SUPPLIER LOT NUMBER
 - SUPPLIER PART NUMBER
 - PART QUANTITY


DOCUMENTATION


- 10. CERTIFICATION OF CONFORMANCE TO ACCOMPANY EACH SHIPMENT AND SHALL INCLUDE THE FOLLOWING INFORMATION:
 - SUPPLIER NAME
 - SUPPLIER LOT NUMBER
 - SUPPLIER PART NUMBER
 - PART QUANTITY
 - PO NUMBER

6

- MATERIAL INFORMATION
- CONFORMANCE STATEMENT TO DRAWING

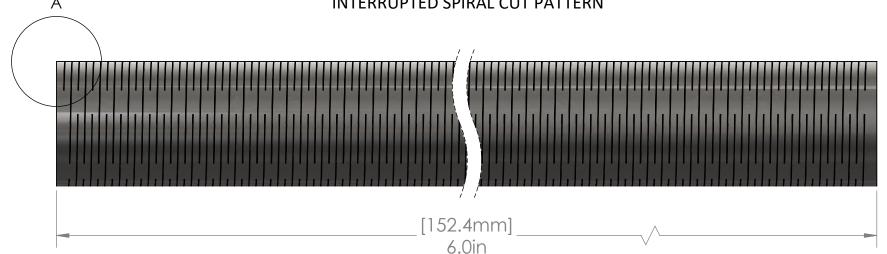



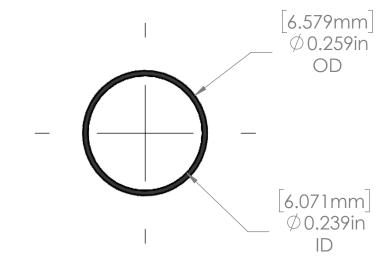

DETAIL A **SCALE 20:1**

> DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED

 $.X \pm .1$ $.XX \pm .01$ $.XXX \pm .001$ ANGLES: ± 3°

INTERPRET PER LATEST ASME Y14.5

MATERIAL: 304 SS



THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETRAY INFOMATION THAT IS THE SOLE PROPERTY OF SYMMETRY LLC. DISCLOSURE OF SAID INFORMATION DOES NOT CONSTITUTE

20F LCHT - 0.259 x 0.239 - 0.015 Pitch, 120 Cut 24 Uncut (2.5 CPR) D

PART NUMBER: SIZE В

SY-028240 DO NOT SCALE SCALE 5:1 SHEET 1 OF 1

5 3 2 1